


The Original Constant Contamination Control System

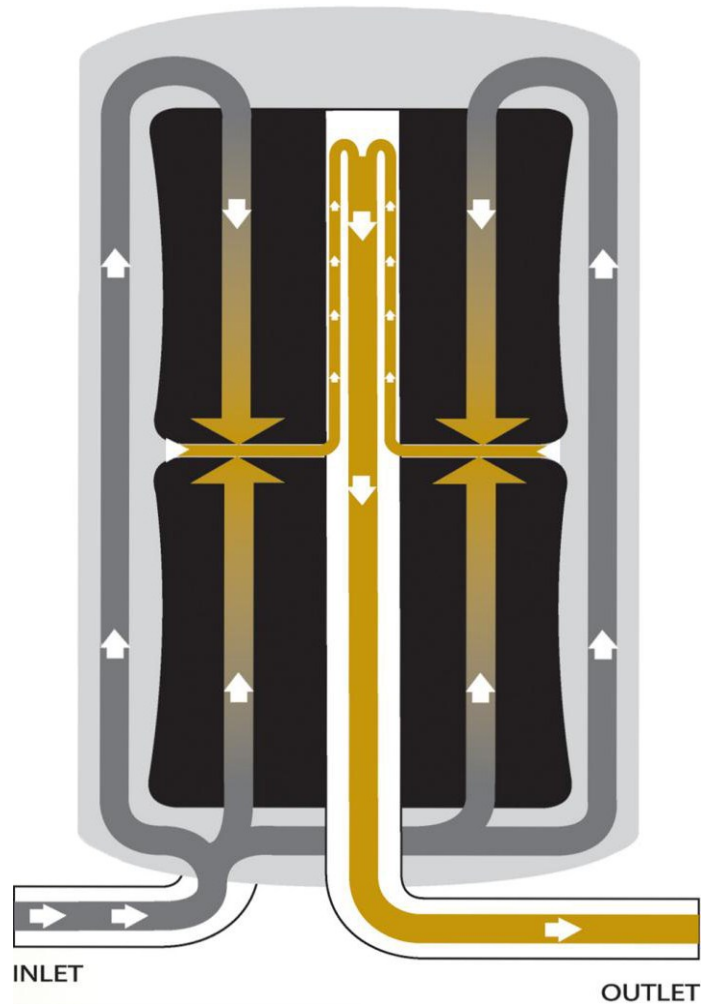

DECREASES

HAZARDOUS WASTE

- Waste Disposal Costs
- Replacement Fluid Costs
- Downtime



HARVARD
CORPORATION®

1-888-345-8737

INCREASES

PROFITABILITY

- Fluid Life
- Equipment Life
- Reduced Labor

Easy To Use

Manual Included

Minimal Training

Use Existing Personnel

Distributed by:
Filtrindustries Ltd

info@filtrindustries.com

www.filtrindustries.com

LUBE AND HYDRAULIC HOUSINGS



1000H Canister Specifications:
Dimensions: 23.87"H x 10.62"W x 10.75"D
Flow rate: from 2.75 to 5.25 GPM
Housing capacity: 20 qt.
Finish: Powder Coated silver color

1000L Canister Specifications:
Dimensions: 23.87"H x 10.62"W x 10.75"D
Flow rate: 2.0 GPM
Housing capacity: 20 qt.
Finish: Powder Coated silver color



Hydraulic housings:
Hydraulic Pressure Compensating (H-PC)
Harvard™ brand H-PC Series, such as the model 1000H-PC, pictured here, controls the pressure and flow and can be connected to systems up to 1500 PSI.



750H Canister Specifications:
Dimensions: 19.25"H x 10.62"W x 10.75"D
Flow rate: from 2.75 to 5.25 GPM
Housing capacity: 16 qt.
Finish: Powder Coated silver color

750L Canister Specifications:
Dimensions: 19.25"H x 10.62"W x 10.75"D
Flow rate: 1.25 GPM
Housing capacity: 16 qt.
Finish: Powder Coated silver color



500H Canister Specifications:
Dimensions: 14.25"H x 10.62"W x 10.75D
Flow rate: from 1.6 to 5.25 GPM
Housing capacity: 12 qt.
Finish: Powder Coated silver color

500L Canister Specifications:
Dimensions: 14.25"H x 10.62"W x 10.75D
Flow rate: 1.25 GPM
Housing capacity: 12 qt.
Finish: Powder Coated silver color

ELEMENTS



1000 Series:
Overall Dimensions: 7.50" dia. x 19.75" lg.

Two section: #1002
Designed to filter hydraulic and lube oils in systems on industrial equipment, heavy equipment, transmission and large diesel engines.

For Viscosity of ISO 10 to 46

Four section: #1004
Designed to filter fluids in systems on Industrial equipment, heavy equipment, transmissions and large diesel engines.

For Viscosity of ISO 46 to 220



Six section: #1006
Designed to filter oil-based EDM fluids, gear and high viscosity oils.

For Viscosity of ISO 220-320

Eight section: #1008
Designed to filter gear oils and very heavy viscosity oils.

For Viscosity of ISO 460 to 1000

//



750 Series
Overall Dimensions: 7.50" dia. x 15.00" lg.

Two section: #7502
Designed to filter medium sized diesel engine oil in heavy mobile or industrial equipment as well as transmissions.

Four section: #7504
Designed to filter oil-based EDM fluids, gear and high viscosity oils.
For Viscosity of ISO 220-320

//



500 Series:
Overall Dimensions: 7.50" dia. x 10.06" lg.

Two section: #5002
Designed to filter engine oil or fluids in systems on industrial equipment, small mobile equipment, and transmissions.

Four section: #5004
Designed to filter gear oils and very heavy viscosity oils.
For Viscosity of ISO 460 to 1000



156H Canister Specifications:
 Dimensions: 21"H x 6.87"W x 8"D Flow
 rate: from 1.0 to 1.6 GPM
 Housing capacity: 9 qt.
 Finish: Powder Coated silver color

156L Canister Specifications:
 Dimensions: 21"H x 6.87"W x 8"D
 Flow rate: .7 GPM
 Housing capacity: 9 qt.
 Finish: Powder Coated silver color



156 Series
 Overall Dimensions: 5.50" dia. x. 16.62" lg.

Two section: #1562
 Designed to filter engine oil or fluids in
 systems on industrial equipment.



150H Canister Specifications:
 Dimensions: 12"H x 6.87"W x 8"D
 Flow rate: from .5 to 1.0 GPM
 Housing capacity: 5 qt.
 Finish: Powder Coated silver color

150L Canister Specifications:
 Dimensions: 12"H x 6.87"W x 8"D
 Flow rate: .7 GPM
 Housing capacity: 9 qt.
 Finish: Powder Coated silver color



150 Series
 Overall Dimensions: 5.50" dia. x 8.81" lg.

Two section: #1502
 Designed to filter engine oil and fluids in
 systems on industrial equipment.



152H Canister Specifications:
 Dimensions: 9.5"H x 6.87"W x 8"D
 Flow rate: from .5 to 1.0 GPM
 Housing capacity: 3 qt.
 *Other Sizes Available
 Finish: Powder Coated silver color

152L Canister Specifications:
 Dimensions: 9.5"H x 6.87"W x 8"D
 Flow rate: .7 GPM
 Housing capacity: 3 qt.
 Finish: Powder Coated silver color



152 Series
 Overall Dimensions: 5.50" dia. x 4.94" lg.

One section: #1521
 Designed to filter engine oil or fluids in
 systems on industrial equipment.



1200H Canister Specifications:
 Dimensions: 44.0"H x 16.75"W x 16.75"D
 1 1/2" NPT Inlet, Outlet, Drain STD
 Element Lifters Included

1200L Canister Specifications:
 Dimensions: 44.0"H x 16.75"W x 16.75"D
 1 1/2" NPT Inlet, Outlet, Drain STD
 Element Lifters Included



1200 Series

Two section: #1203
 Dimensions: 11.0" dia. x 10.625" lg.
 Designed to filter lighter viscosity fluids
 such as Diesel fuel and light viscosity
 hydraulic oils up to ISO 46.

Two section: #1204
 Dimensions: 11.0" dia. x 7.75" lg.
 Designed to filter fluids in large diesel
 engines and systems on industrial
 equipment, heavy equipment, and
 transmissions.
 For viscosity of ISO 46-150

Two section: #1205
 Dimensions: 11.0" dia. x 6.25" lg.
 Designed for heavy viscosity oils.
 For viscosity of ISO 220 to 460

WATER-BASED ELEMENTS

Designed to filter water-based fluids, coolants, and water-based EDM fluids.

1000 Series: 7.50" dia. x 19.75" lg.

1002W #5439

Designed for low flow rate.

1004W #3902

Designed for higher flow rates and to filter light glycol mixtures.

1006W #4467

Designed for high glycol mixtures.

1200 Series:


1203W #5439

Designed for light glycol mixtures.

500 Series: 7.50" dia. x 10.06" lg.

500W #4706

Designed to filter water-based fluids, coolants, light glycol mixtures and water-based EDM fluids.

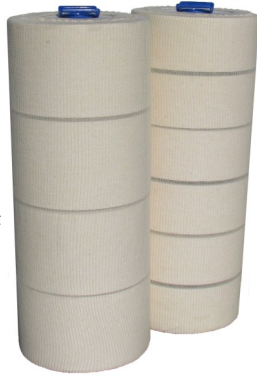

SPIN-ON ELEMENTS

Harvard™ "Spin-On" filters provide filtration for light industrial applications, cars, campers, vans, trucks, and tractors.

Hydraulic

Lube

Model H 61

Model L 61

Model 125-S

*Model 750-S

*Can replace O.E.M. bypass lube filters.

Convenient spin-on feature.

Specifications:

Maximum operating pressure: 80 PSI

Flow rate: SAE 30 @ 180°F: .5 GPM

Filter capacity: (make-up oil) L&H-61 1.0 qt.

Filter capacity: (make-up oil) 125-S and 750-S 2.5 qt.

Mounting base kit required for spin-on filters sold separately.



Oil should be filtered each time it is transferred from one vessel to another because additional contamination is inevitably introduced whenever oil is handled.

PORTABLE FILTRATION SYSTEM

Removes contaminants to a single micron, removes water and glycol. Portable design moves easily from site to site, increases fluid life, decreases hazardous waste disposal. Use on most synthetic and petroleum-based fluids.

Operation/service manual included.

Applications: for most hydraulic and lube oil reservoirs in manufacturing, machine shops, injection molding, oil EDM machines.

Configuration: single housing, dual housing, optional bag filter.

Flow rate: 1 - 8 GPM



PORTABLE COOLANT SYSTEM

Removes contaminants to a single micron. Portable design moves easily from site to site. Increases coolant and tool life.

Decreases hazardous waste disposal.

Applications: manufacturing, machine shops, water EDM machines.

Configuration: single housing, bag filter.

Flow rate: 4.5 GPM



WALL MOUNT, FLOOR MOUNT AND STATIONARY SYSTEMS

These custom systems can be built to your configurations and specifications. The same Harvard™ Brand quality will reduce waste generated significantly.

